EFR6258


225-400HP



- ✓ Gamma-Ti Turbine Wheel
- ✓ Dual Ball Bearing Assy with Metal Cage
- ✓ Forged Milled Extended Tip Compressor Wheel
- Stainless Steel Turbine Housing
- **✓** Water Cooled Bearing Housing
- ✓ Large Internal Wastegate (where applicable)
- ✓ Compressor Recirculation Valve (a.k.a BOV)
- ✓ Boost Control Solenoid Valve
- ✓ Standard T25 Mounting Flange


Not included with turbo assemblies:


- Speed sensor
- Turbine outlet V-Band
- Turbine inlet gasket
- Oil drain gasket or drain port fitting

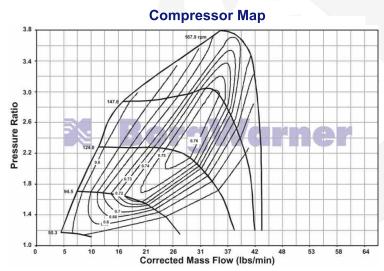




Turbo Frame Dimensions








Super Core Configuration

The following parts are not included as part of the super-core assembly; turbine housing, assembly, clamp plate hardware, wastegate parts.



Turbine Housing Options

Turbine Housing		inlet flange	Housing
Part Number	A/R	shape	Config
11581009006	0.64	T25	Single Scroll
	0.04	123	WG
11581009007	0.92	T4	Twin Scroll
		14	WG

				Comp. Whl					Inlet
	Turbo Frame	Super Core Part	Comp. Whl O.D.	Comp. Whl	Comp. Whl	Inducer	Turb. Whl		Flange
Turbo Part Number	Size	Number	(in)	Inducer Dia (in)	O.D.(mm)	Dia(mm)	OD(mm)	Turb. A/R	Config
179150	B1	179140	2.42	1.95	61.4	49.6	58.0	.64	T25